CENTER 320 Sound Level Meter

Our standard sound level meter CENTER 320 has a wide dynamic range from 30 to 130 dB. It has different frequency weighting A and C to respond to human sense or machine monitoring purposes. For different sound pattern, it also supplies Fast and Slow time constant setting. Analog output is also provided for other use.



FEATURES:

- 4 Digits Display
- MAX/MIN Function
- Level Range Display
- Resolution 0.1dB
- AC/DC Signal Output
- IEC 651 TYPE II

SPECIFICATIONS

Level Range Lo=30 \sim 80dB; Med=50 \sim 100dB; Hi=80 \sim 130dB Accuracy \pm 1.5dB (ref 94dB@1KHz)

Frequency Weighting
Time Weighting
Dynamic Range
Frequency Range

A / C
Fast, Slow
50dB
31.5Hz to 8KHz


Microphone Electret condenser microphone

Auxiliary Outputs
Battery
Dimensions
Weight

AC/DC Output
9V battery
275x64x30 mm
Approx.280g

STANDARD ACCESSORIES

Battery, Operation Manual, Carrying Case, Calibration Screwdriver, Windscreen, $3.5\,\varphi\,$ plug.

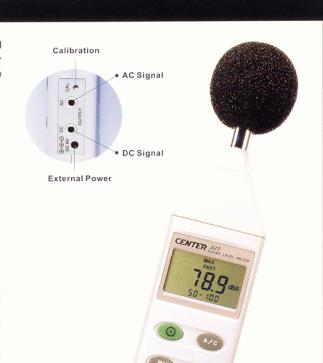

IEC 651 TYPE II

